


EAP101



INDOOR WI-FI 6 ACCESS POINT

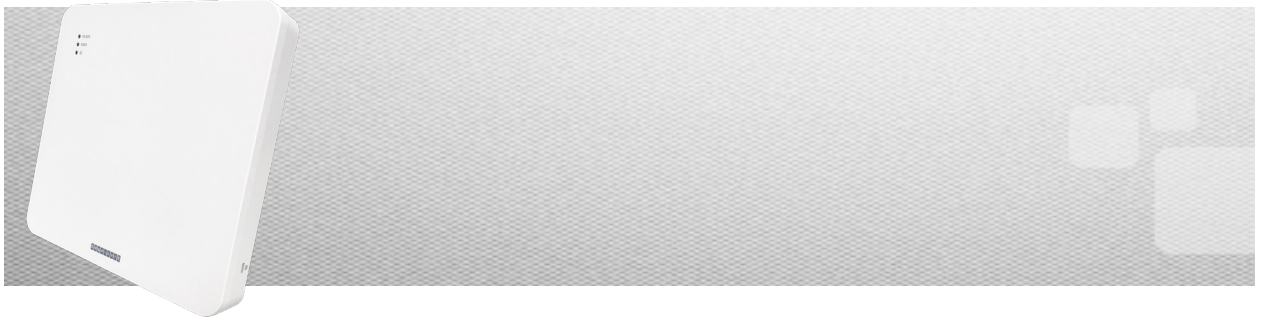

INTRODUCTION

EAP101 is an enterprise-grade, concurrent dual-band Wi-Fi 6 indoor access point. EAP101 supports 2x2:2 uplink and downlink MU-MIMO between the AP and multiple clients, with up to 1.7Gbps aggregated data rate. EAP101 is equipped with Bluetooth Low Energy (BLE) radio and ZigBee enabling value-added applications such as iBeacon, presence.

EAP101 can be operated as standalone mode or managed by Edgecore ecCLOUD and EWS-Series controller.

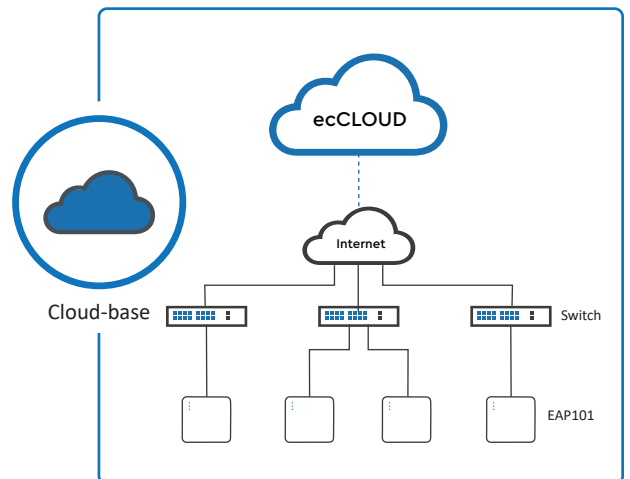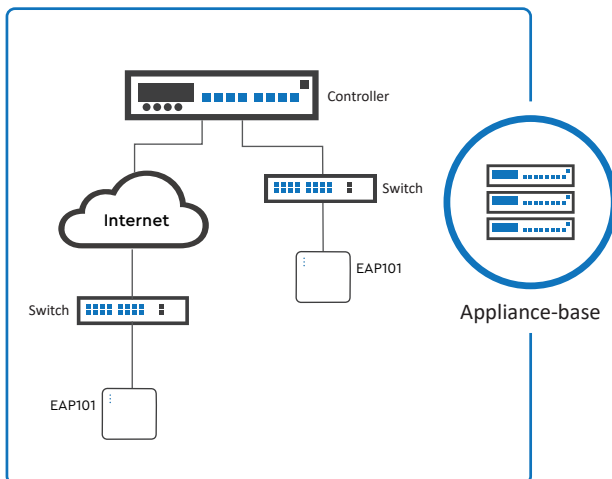

HIGHLIGHTS

- Concurrent Dual-Band 2.4 GHz & 5 GHz
- 802.11ax 2x2:2 UL MU-MIMO supporting up to 1.7 Gbps data rate
- Support up to 32 ESSIDs.
- Enterprise-Grade Wireless Security
- Bluetooth Low Energy (BLE)
- ZigBee
- 802.3at Power over Ethernet (PoE)

SPECIFICATIONS

PHYSICAL	
Power	<ul style="list-style-type: none"> DC Input: 12V / 2.0A (Power adapter included) PoE: 802.3at compliant (PoE injector not included)
Dimensions (L x W x H)	<ul style="list-style-type: none"> 19.5 cm x 19.5 cm x 3.9 cm
Weight	<ul style="list-style-type: none"> 0.65 kg (1.44 lbs)
Interfaces	<ul style="list-style-type: none"> Uplink: 1 x 10/100/1000/2.5GBase-T Ethernet, Auto MDIX, RJ-45 with 802.3at PoE LAN: 2 x 10/100/1000Base-T Ethernet, Auto MDIX, RJ-45 Console: 1 x RJ-45 Port USB: 1 x USB 2.0 Port
LED Indicator	<ul style="list-style-type: none"> 2.4G-WiFi / 5G-WiFi / Power
Buttons	<ul style="list-style-type: none"> Restart / Reset
Environmental Conditions	<ul style="list-style-type: none"> Operating Temperature: 0°C (32°F) to 50°C (122°F) Operating Humidity: 5% to 95% non-condensing
Power Consumption	<ul style="list-style-type: none"> 22.4W max.
Antenna	<ul style="list-style-type: none"> Type: 3 x Built-in antenna (2 x 2.4 GHz & 5 GHz, 1 x Bluetooth Low Energy) Gain: 4.8 dBi (2.4 GHz), 6 dBi (5 GHz), 4.6 dBi (BLE)
Mounting	<ul style="list-style-type: none"> Wall/Ceiling/T-bar mount (Mounting kit included)
Anti-theft	<ul style="list-style-type: none"> 1 x Kensington lock slot
WI-FI	
Standards	<ul style="list-style-type: none"> 802.11a/b/g/n/ac/ax Concurrent dual-band 2.4 & 5 GHz
Supported Data Rates	<ul style="list-style-type: none"> 802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6.5 – 300 Mbps (20 / 40 MHz) 802.11ac: 6.5 – 867 Mbps (20 / 40 / 80 MHz) 802.11ax: 3.6 – 574 Mbps (2.4 GHz, 20 / 40 MHz) 802.11ax: 3.6 – 1200 Mbps (5 GHz, 20 / 40 / 80 MHz)
Radio Chains	<ul style="list-style-type: none"> 2 x 2
Spatial Streams	<ul style="list-style-type: none"> 2; MU-MIMO support
Aggregate Conducted Transmit Power*1	<ul style="list-style-type: none"> 2.4 GHz: Up to 26 dBm*2 5 GHz: Up to 26 dBm*2
Channelization	<ul style="list-style-type: none"> 2.4 GHz: 20 / 40 MHz 5 GHz: 20 / 40 / 80MHz
Frequency Range	<ul style="list-style-type: none"> 2.400 – 2.483 GHz 5.150 – 5.850 GHz
Operating Channels	<ul style="list-style-type: none"> 2.4 GHz: 1 – 11 (US), 1 – 13 (Europe), 1 – 13 (Japan) 5 GHz*3: 36 – 165 (US), 36 – 140 (Europe), 36 – 144 (Japan)
ESSIDs	<ul style="list-style-type: none"> Up to 16 per radio (32 total)
Certifications	<ul style="list-style-type: none"> FCC, CE, LVD, NCC, BSMI, VCCI, JATE, TELEC, IC, C-Tick, ANATEL, WIFI Alliance (Sub-category: Enterprise/Service Provider Access Point, Switch/Controller or Router)
PERFORMANCE	
Physical Data Rate	<ul style="list-style-type: none"> Up to 574 Mbps (2.4 GHz) Up to 1200 Mbps (5 GHz)
Supported Clients	<ul style="list-style-type: none"> 512 clients

*1: RF output power aggregates across MIMO chains and doesn't contain antenna gain

*2: Maximum power is limited by local regulatory requirements


*3: Some channels are restricted by local regulatory and certifications.

FEATURES	
Wireless	<ul style="list-style-type: none"> ✦ 802.11 k/r ✦ Orthogonal Frequency Division Multiple Access (OFDMA) ✦ Client Isolation ✦ Open Mesh ✦ Auto Channel Selection ✦ Support up to 1024 QAM Modulation
Network	<ul style="list-style-type: none"> ✦ Spanning Tree Protocol (STP) ✦ Dynamic Host Configuration Protocol (DHCP) ✦ 802.1q ✦ Access Control List (ACL) ✦ Network Address Translation (NAT) ✦ Dynamic VLAN ✦ Link Layer Discovery Protocol (LLDP)
Security	<ul style="list-style-type: none"> ✦ WPA-Personal (AES) ✦ WPA-Enterprise (AES) ✦ WPA2-Personal (AES) ✦ WPA2-Enterprise (AES) ✦ WPA3-Personal (AES) ✦ WPA3-Personal Transition (AES) ✦ WPA3-Enterprise (AES) ✦ WPA3-Enterprise transition (AES) ✦ MAC Address Authentication ✦ 802.1X ✦ Support MPSK
Maintenance	<ul style="list-style-type: none"> ✦ Network Time Protocol (NTP) ✦ Standalone ✦ Management by ecCLOUD ✦ Management by EWS-Series Controller (Complete tunnel) ✦ SSH ✦ QR Code Onboarding ✦ SNMP v2c ✦ Remote Syslog
QoS	<ul style="list-style-type: none"> ✦ RSSI Threshold (Optimal Client Filtering)
Others	<ul style="list-style-type: none"> ✦ iBeacon ✦ Dynamic Power Level Adjustment ✦ Operation in Mesh mode ✦ Target Wake Time (TWT) ✦ BSS Coloring ✦ 16 VLANs ✦ Static IP Addressing ✦ DHCP Client for Automatic Network Configuration ✦ SSID propagation


SIGNAL COVERAGE PATTERN

Azimuth


■ 2.4 GHz

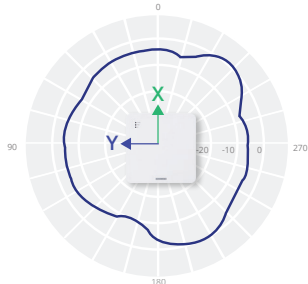

■ 5 GHz

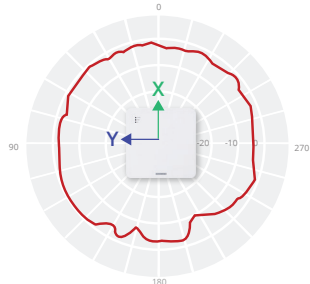


■ Bluetooth Antenna

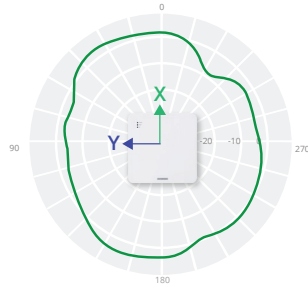


Elevation


■ 2.4 GHz

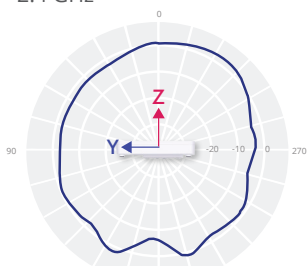

■ 5 GHz

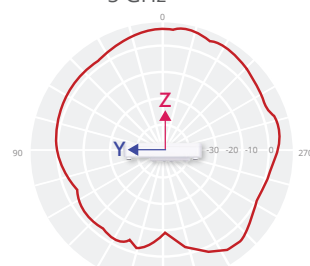

■ Bluetooth Antenna

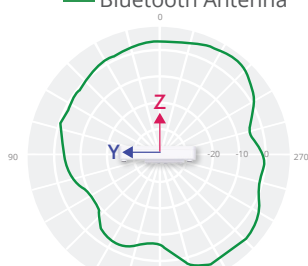

RECEIVE SENSITIVITY

Operating Mode	Data Rate	Receive Sensitivity (dBm)
802.11b	1 Mbps	-95
	11 Mbps	-87
802.11a	6 Mbps	-89
	54 Mbps	-72
802.11g	6 Mbps	-90
	54 Mbps	-73
802.11n (2.4 GHz/HT20)	MCS0	-90
	MCS7	-72
802.11n (2.4 GHz/HT40)	MCS0	-86
	MCS7	-70
802.11n (5 GHz/HT20)	MCS0	-89
	MCS7	-71
802.11n (5 GHz/HT40)	MCS0	-86
	MCS7	-70
802.11ac (VHT20)	MCS0	-90
	MCS8	-69
802.11ac (VHT40)	MCS0	-86
	MCS9	-64
	MCS8	-64
802.11ac (VHT80)	MCS0	-84
	MCS9	-60
802.11ax (2.4 GHz/HE20)	MCS0	-90
	MCS11	-62
802.11ax (2.4 GHz/HE40)	MCS0	-86
	MCS11	-59
802.11ax (5 GHz/HE20)	MCS0	-89
	MCS11	-60
802.11ax (5 GHz/HE40)	MCS0	-86
	MCS11	-58
802.11ax (5 GHz/HE80)	MCS0	-84
	MCS11	-56