

ECWO5211-L

Outdoor Access Point

Concurrent Dual-Band 11ac Wave 2 Outdoor AP



Product Overview

The ECWO5211-L is an enterprise-grade, concurrent dual-band 802.11ac Wave 2 outdoor access point, designed specifically to withstand harsh weather conditions with an IP68-rated, rust-resistant plastic housing for outdoor and industrial environments. The ECWO5211-L features two 2x2:2 MU-MIMO radios that can each transmit data to multiple clients simultaneously, and together have a combined data rate of up to 1.2 Gbps. The ECWO5211-L's integration with Bluetooth Low Energy (BLE) (Not available in Brazil) also enables new value-added applications such as location tracking, iBeacon, and other location-based services. Besides, with a built-in GPS receiver, IT administrators can easily keep track of the location of all ECWO5211-Ls deployed, simplifying the maintenance task and adding a new potential of location-related services.

When used with an Edgecore Controller, additional value-added applications such as bandwidth control, user authentication, and captive portals can be used to provide an ideal solution for all types of businesses.

Highlights

Wi-Fi


- Concurrent dual-band 2.4 GHz and 5 GHz
- 802.11ac 2x2 MU-MIMO supporting up to 1.2 Gbps data rate
- Support up to 32 ESSIDs
- Enterprise-grade wireless security

Physical

- Wall, hose clamp, and uniaxial mountable
- IP68 weatherproof plastic housing
- Industrial temperature range
- 802.3at Power over Ethernet (PoE)
- Bluetooth Low Energy (BLE)
- Built-in Global Positioning System (GPS)

Management with controller

- Captive portal and guest provisioning
- Fast Layer 2/Layer 3 roaming
- User-based access management
 - Bandwidth control
 - Firewall policies
 - Routing policies
- Wi-Fi monetization

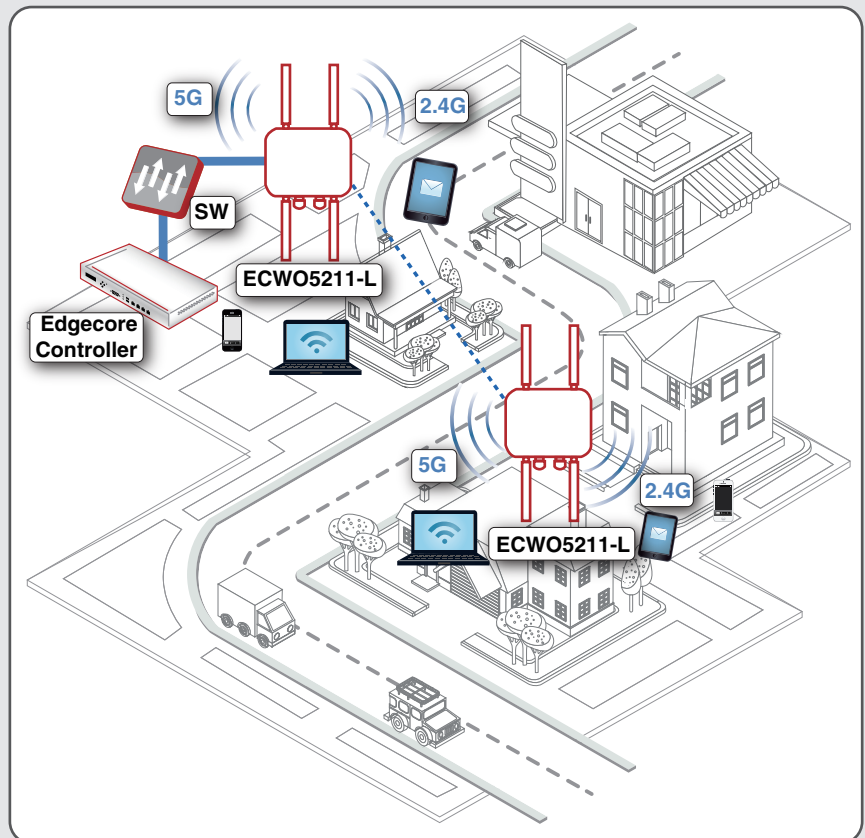

Outdoor Access Point

Features

Physical

Power: PoE: 802.3at compliant or 48 V/0.5 A passive PoE injector
 Dimensions: 25.0 cm (L) x 20.0 cm (W) x 8.0 cm (H)

1.53 kg (3.37 lbs) (Including antennas)

Interfaces:

- Uplink: 1 x 10/100/1000BASE-T Ethernet, Auto MDIX, RJ-45 with 802.3at PoE

- LAN: 1 x 10/100/1000BASE-T Ethernet, Auto MDIX, RJ-45 LED

Indicator: Power/LAN1/LAN2/2.4 GHz/5 GHz Environmental

Conditions:

- Operating Temperature: -40°C (-40°F) to 65°C (149°F)

- Operating Humidity: 10% to 95% non-condensing

Power Consumption: 20 W max.

Antenna:

- Type: 4 x external N-type connectors (2 x 2.4 GHz, 2 x 5 GHz), 1

- x built-in PIFA (1 x BLE), 1 x built-in patch (1 x GPS)

- Gain: 5 dBi (2.4 GHz), 7 dBi (5 GHz), 2 dBi (BLE)

Mounting: Pole mount hose clamp

Wi-Fi

Standards:

- 802.11a/b/g/n/ac; Wave 2

- Concurrent dual-band 2.4 and 5 GHz

Supported Data Rates:

- 802.11b: 1, 2, 5.5, 11 Mbps

- 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

- 802.11n: 6.5 – 144 Mbps (20 MHz)

- 802.11n: 13.5 – 300 Mbps (40 MHz)

- 802.11ac: 6.5 – 173.4 Mbps (20 MHz)

- 802.11ac: 13.5 – 400 Mbps (40 MHz)

- 802.11ac: 29.3 – 866.6 Mbps (80 MHz)

Radio Chains: 2 x 2

Spatial Streams: 2 ; MU-MIMO support

Output Power:

- 2.4 GHz: Up to 23 dBm*1

- 5 GHz: Up to 23 dBm*1

Channelization: 20 MHz, 40 MHz, 80 MHz

Frequency Band: 2.412 – 2.472 GHz, 5.180 – 5.825 GHz³

Operating Channels:

- 2.4 GHz: 1 – 11 (US), 1 – 13 (Europe), 1 – 13 (Japan)

- 5 GHz*2: 36 – 165 (US), 36 – 140 (Europe), 100 – 140 (Japan)

ESSIDs: Up to 16 per radio (32 total)

Certifications: FCC (United States), CE (Europe)

Performance

Physical Data Rate:

- Up to 300 Mbps (2.4 GHz)

- Up to 867 Mbps (5 GHz)

Concurrent Users: Up to 256 (128 on 2.4 GHz, 128 on 5 GHz)

Quality of Service

Wireless QoS (802.11e/WMM)

DSCP (802.1p)

Airtime fairness

Band steering

Multicast to unicast conversion

Optimal client filtering

*1: Maximum power is limited by local regulatory requirements

*2: Some channels are restricted by local regulatory requirements

*3: Frequency Band for Brazil to meet regulatory 5.470 - 5.825GHz

Management

Deployment:

- Standalone

- Tunneled management by controller

- IPv4 and IPv6 compatible

Configuration:

- Web user interface (HTTP/HTTPS)

- SNMP v1, v2c, v3

Security

Wireless Security:

- WEP

- WPA/WPA2 Mixed (TKIP/AES Mixed)

- WPA2-Personal (AES)

- WPA2-Enterprise (AES)

VLAN tagging (802.1Q)

Station isolation

DHCP snooping

Layer-2 firewall

Mobility/Roaming

Layer 2/Layer 3 fast roaming

Receive Sensitivity

Operating Mode	Data Rate	Receive Sensitivity (dBm)
802.11b	1 Mbps	-96
	11 Mbps	-90
802.11a	6 Mbps	-92
	54 Mbps	-75
802.11g	6 Mbps	-93
	54 Mbps	-71
802.11n (HT20)	MCS0	-93
	MCS7	-71
	MCS8	-93
802.11n (HT40)	MCS15	-71
	MCS0	-92
	MCS7	-70
802.11ac (VHT20)	MCS8	-90
	MCS15	-70
	MCS0	-92
802.11ac (VHT40)	MCS8	-69
	MCS0	-90
802.11ac (VHT80)	MCS9	-65
	MCS0	-86
802.11ac (VHT80)	MCS9	-61
	MCS0	-86

Features

Warranty

Please check www.edge-core.com for the warranty terms in your country.

For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886-3-563-8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2018 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.